

# RZN 4503-T/G



The SHEV control panel, ventilation button and trigger button are installed in one housing. The D+H control panel has an output of 3 A and is ideal for stairwells and single rooms. VdS certified according to ISO 21927-9, fulfils DIN 18232-9.

# Performance features

- + Compact SHEV control panel, specifically for stairwells
- + Tested and certified according to ISO 21927-9, VdS 2581, VdS 2593, VdS 2344 and DIN EN 12101-10, fulfils the building authority requirements in accordance with DIN 18232-9
- + Up to 3 A total drive current
- + Stabilised output voltage
- + Integrated smoke extraction and ventilation button
- + Switchable SHEV safety functions: Fault equal to alarm, SHEV retriggering function and smoke detector remote reset
- + Integrated comfort functions for daily ventilation
- + 2 freely programmable and isolated signalling contacts
- + Optional connection to rain detectors or wind / rain sensors without an additional module
- + Connection of up to 8 SHEV operation panels and 14 fire detectors per line (Only detectors permitted by D+H may be used)
- + Easy installation by separating installation plate and upper housing

## Approvals / Certificates

Find out about permission details from your D+H Partner.



G 509006



0786-CPD-50435


# Technical data

## RZN 4503-T/G

Supply	230 V AC / 50 Hz / 100 VA
Stand-by power	< 5 W
Output	24 V DC / 3 A
Ripple	< 0,5 Vss
Mode of operation monitoring	Continuous duty
Mode of operation Alarm / Ventilation	Short-time duty 30 % duty cycle
Type of protection	IP 30
Temperature range	-5 °C ... +40 °C
Line / Group	1 / 1
Housing	Aluminium
Colour	Grey (~ RAL 7035)
W x H x D	156 x 235 x 82 mm
Battery type	Typ 8 (1x)
Weight	1.9 kg
Art. No.	30.107.40

Batteries must be ordered separately.

# Example of application

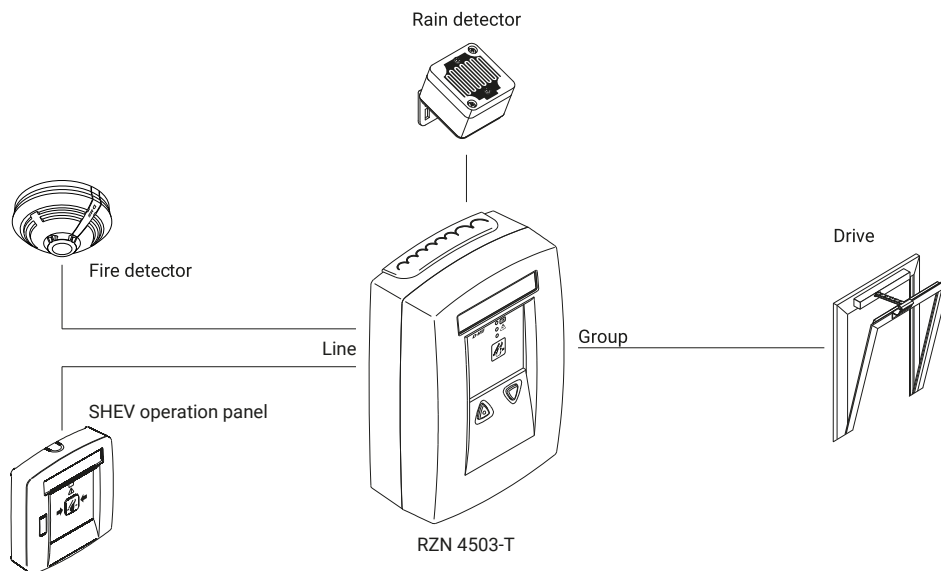

# Dimensions

All specifications in mm

