

# RZN 4503-T/Y



## Performance features

- + Compact SHEV control panel, specifically for stairwells
- + Integrated comfort functions for daily ventilation
- + Tested and certified according to ISO 21927-9, VdS 2581, VdS 2593, VdS 2344 and DIN EN 12101-10, fulfils the building authority requirements in accordance with DIN 18232-9
- + 2 freely programmable and isolated signalling contacts
- + Up to 3 A total drive current
- + Optional connection to rain detectors or wind / rain sensors without an additional module
- + Stabilised output voltage
- + Connection of up to 8 SHEV operation panels and 14 fire detectors per line (Only detectors permitted by D+H may be used)
- + Integrated smoke extraction and ventilation button
- + Easy installation by separating installation plate and upper housing
- + Switchable SHEV safety functions: Fault equal to alarm, SHEV retriggering function and smoke detector remote reset

## Approvals / Certificates

Details of approval on request.



G 509006



0786-CPD-50435


# Technical data

## RZN 4503-T/Y

<b>Supply</b>	230 V AC / 50 Hz / 100 VA
<b>Stand-by power</b>	< 5 W
<b>Output</b>	24 V DC / 3 A
<b>Ripple</b>	< 0,5 V <sub>ss</sub>
<b>Mode of operation monitoring</b>	Continuous duty
<b>Mode of operation alarm / ventilation</b>	Short-time duty 30 % duty cycle
<b>Type of protection</b>	IP 30
<b>Temperature range</b>	-5 °C ... +40 °C
<b>Line / Group</b>	1 / 1
<b>Housing</b>	Aluminium
<b>Colour</b>	Yellow (~ RAL 1004)
<b>W x H x D</b>	156 x 235 x 82 mm
<b>Battery type</b>	Typ 8 (1x)
<b>Weight</b>	1.9 kg
<b>Art. No.</b>	30.107.60

Batteries must be ordered separately.

## Example of application

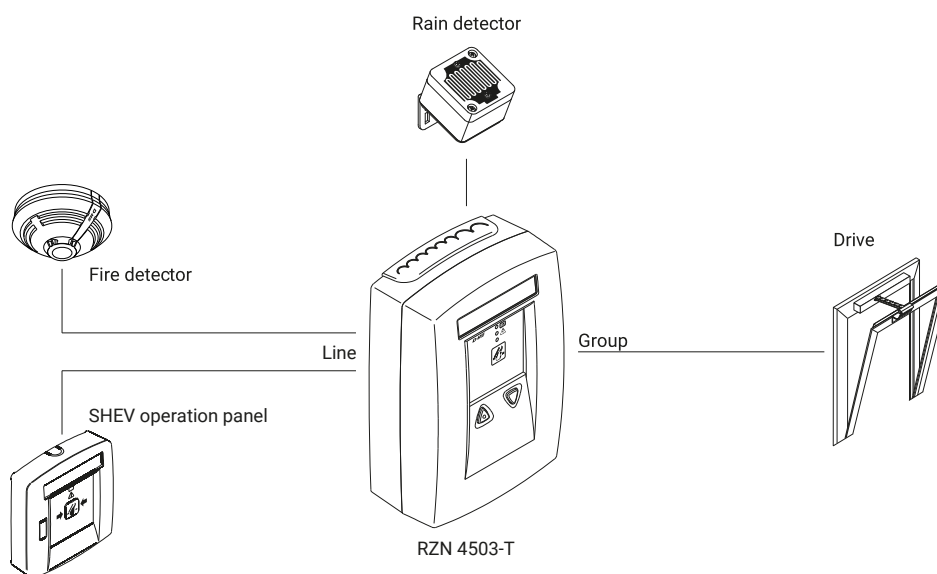

# Dimensions

All specifications in mm

