GVL 8301-K V2

Performance features

- Compact ventilation control panel
- For controlling 24 V DC window drives
- Up to 1 A total drive current
- 1 ventilation group
- Input for external controller, e.g. timer
- Ventilation safety function (storage operation OPEN / CLOSED)
- Ability to connect drives with TMS function
- Optional connection to rain detectors or wind / rain sensors without an additional module
- Surface-mounted plastic housing

We reserve the right to make changes
Source: www.dh-partner.com, Status 02.06.2026

Technical data

	GVL 8301-K V2
Supply	230 V AC / 50 Hz / 30 VA
Stand-by power	4.3 W
Output	24 V DC / 1 A
Mode of operation	Short-time duty 20 % duty cycle
Type of protection	IP 66
Temperature range	-5 °C … +40 °C
Group(s)	1
Housing	Polypropylene
Colour	Light grey (~ RAL 7035)
W x H x D	180 x 130 x 77 mm
Weight	0.85 kg
Art. No.	30.242.00

Example of application

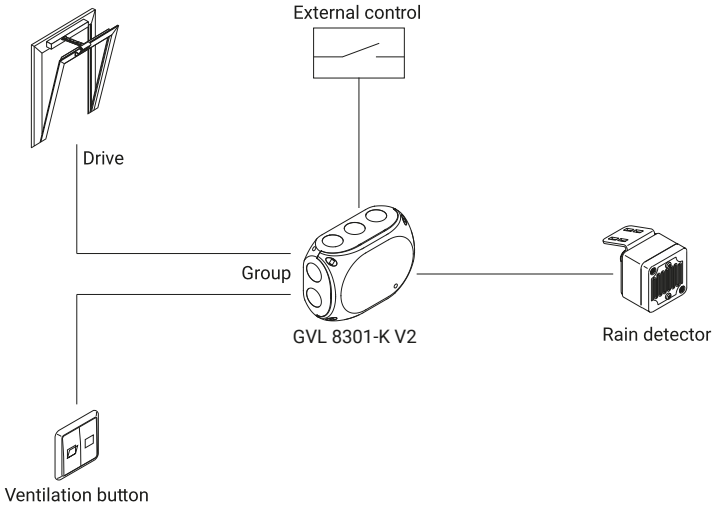

We reserve the right to make changes
Source: www.dh-partner.com, Status 02.06.2026