# GVL 8401-K-RC V2

## Performance features

- Compact ventilation control panels with an integrated wireless receiver for controlling 24 V DC window drives
- Up to 1 A total drive current
- 2 ventilation groups
- Optional individual and/or control circuit (OPEN / CLOSED)
- Configurable ventilation safety function (storage operation OPEN / CLOSED)
- Freely programmable group assignment for central inputs (weather, time, etc.)
- Operation via wireless remote control (Multiple control panels can be controlled with one remote control)
- 868 MHz radio frequency, permitted throughout the EU
- High level of security against external control - 24 bit address code and transmitting code change at each button press (hopping code)

We reserve the right to make changes
Source: www.dh-partner.com, Status 03.06.2026

# Technical data

| | GVL 8401-K-RC V2 |
|---|---|
| **Supply** | 230 V AC / 50 Hz / 56 VA |
| **Stand-by power** | < 1 W |
| **Output** | 24 V DC / 1 A |
| **Mode of operation** | Short-time duty 20 % duty cycle |
| **Type of protection** | IP 66 |
| **Temperature range** | -5 °C … +40 °C |
| **Group(s)** | 2 |
| **Housing** | Polypropylene |
| **Colour** | Light grey (~ RAL 7035) |
| **W x H x D** | 180 x 130 x 77 mm |
| **Weight** | 0.97 kg |
| **Art. No.** | 30.241.90 |

# Example of application

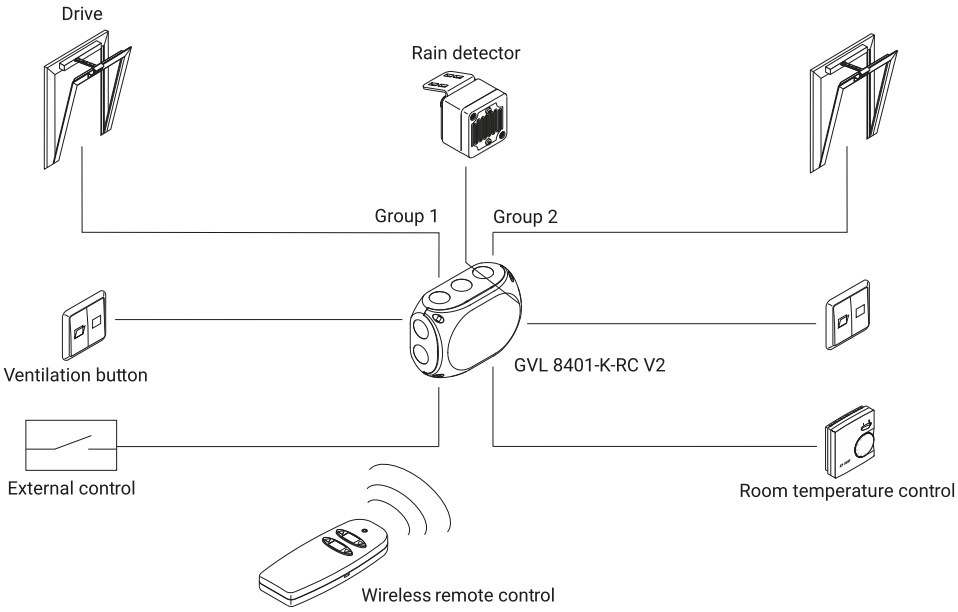


We reserve the right to make changes
Source: www.dh-partner.com, Status 03.06.2026