GH-CPS-M/-P

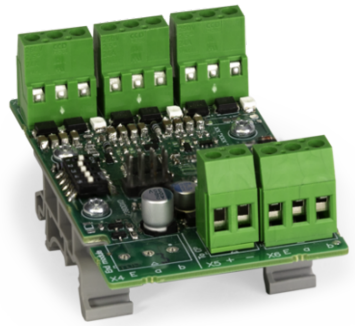

Performance features

+ Division of a drive line into three monitored outputs for structured, star-shaped cabling
+ Reduction of cable cross-sections for space- and cost-efficient power distribution
+ Perfect integration with CPS-M and CPS-P thanks to top hat rail installation
+ High flexibility in cable routing

Technical data

	GH-CPS-M/-P
Supply	24 V DC
Mode of operation alarm / ventilation	Short-time duty 30 % duty cycle
Temperature range	-5 °C … +40 °C
W x H x D	50 x 85 x 39 mm
Weight	0.07 kg
Art. No.	30.555.50

We reserve the right to make changes
Source: www.dh-partner.com, Status 19.07.2026