
### RT Series RT operation unit

## D+H=

# RT BE45-2





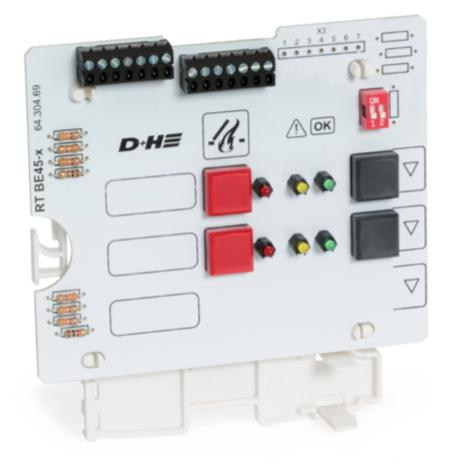

The RT BE45-2 operation unit integrates two separate fire and smoke compartments in one RT 45 operation panel.

#### Performance features

- + For SHEV triggering 2 separate fire/smoke compartments
- + Common earth can be disconnected via DIP switch
- + Functions per SHEV area: OPEN / CLOSED (sealed CLOSED button)
- Displays per SHEV area: Alarm, inspection and fault indication

## Technical data

|                   | RT BE45-2    |
|-------------------|--------------|
| Input voltage     | 18 28 V DC   |
| Temperature range | -5 °C +40 °C |
| WxH               | 105 x 115 mm |
| Diameter          | 0 mm         |
| Weight            | 0.08 kg      |
| Art. No.          | 30.451.60    |