


# RT BE45-3

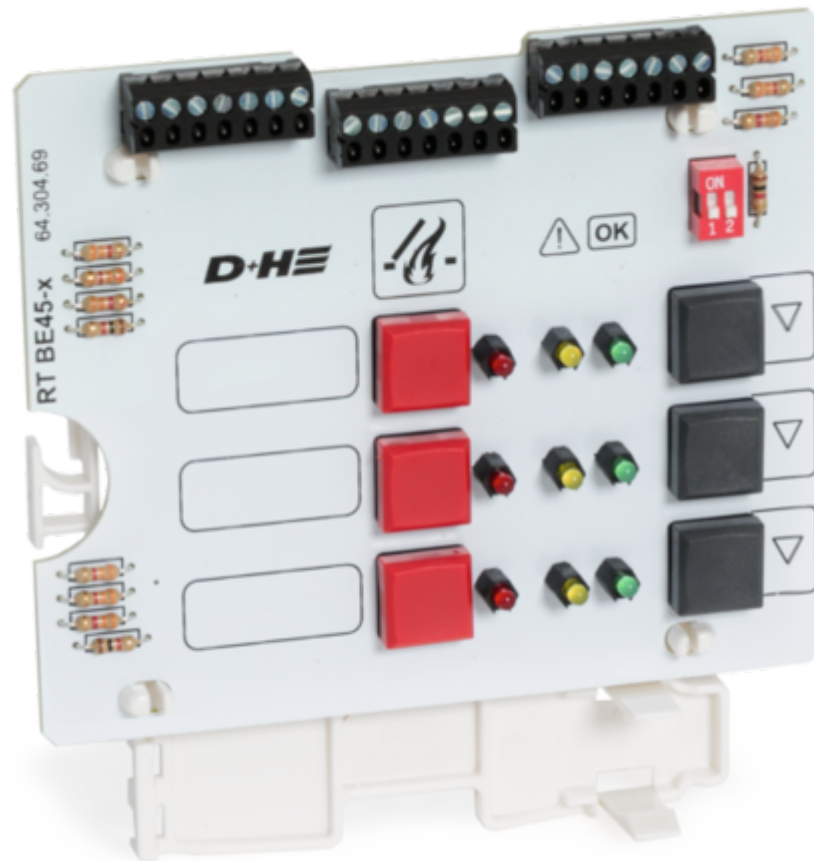

The RT BE45-3 has the same functions as the RT BE45-2, but is equipped with three separate fire and smoke compartments in one operation panel.

## Performance features

- + For SHEV triggering 3 separate fire/smoke compartments
- + Common earth can be disconnected via DIP switch
- + Functions per SHEV area: OPEN / CLOSED (sealed CLOSED button)
- + Displays per SHEV area: Alarm, inspection and fault indication

# Technical data

RT BE45-3

Input voltage	18 ... 28 V DC
Temperature range	-5 °C ... +40 °C
W x H	105 x 115 mm
Diameter	0 mm
Weight	0.08 kg
Art. No.	30.451.70