

RZN 4503-T/Y



The SHEV control panel, ventilation button and trigger button are installed in one housing. The D+H control panel has an output of 3 A and is ideal for stairwells and single rooms. VdS certified according to ISO 21927-9, fulfils DIN 18232-9.

Performance features

- + Compact SHEV control panel, specifically for stairwells
- + Tested and certified according to ISO 21927-9, VdS 2581, VdS 2593, VdS 2344 and DIN EN 12101-10, fulfils the building authority requirements in accordance with DIN 18232-9
- + Up to 3 A total drive current
- + Stabilised output voltage
- + Integrated smoke extraction and ventilation button
- + Switchable SHEV safety functions: Fault equal to alarm, SHEV retriggering function and smoke detector remote reset
- + Integrated comfort functions for daily ventilation
- + 2 freely programmable and isolated signalling contacts
- + Optional connection to rain detectors or wind / rain sensors without an additional module
- + Connection of up to 8 SHEV operation panels and 14 fire detectors per line (Only detectors permitted by D+H may be used)
- + Easy installation by separating installation plate and upper housing

Approvals / Certificates

Find out about permission details from your D+H Partner.



G 509006



0786-CPD-50435


Technical data

RZN 4503-T/Y

| | |
|---------------------------------------|---------------------------------|
| Supply | 230 V AC / 50 Hz / 100 VA |
| Stand-by power | < 5 W |
| Output | 24 V DC / 3 A |
| Ripple | < 0,5 Vss |
| Mode of operation monitoring | Continuous duty |
| Mode of operation Alarm / Ventilation | Short-time duty 30 % duty cycle |
| Type of protection | IP 30 |
| Temperature range | -5 °C ... +40 °C |
| Line / Group | 1 / 1 |
| Housing | Aluminium |
| Colour | Yellow (~ RAL 1004) |
| W x H x D | 156 x 235 x 82 mm |
| Battery type | Typ 8 (1x) |
| Weight | 1.9 kg |
| Art. No. | 30.107.60 |

Batteries must be ordered separately.

Example of application

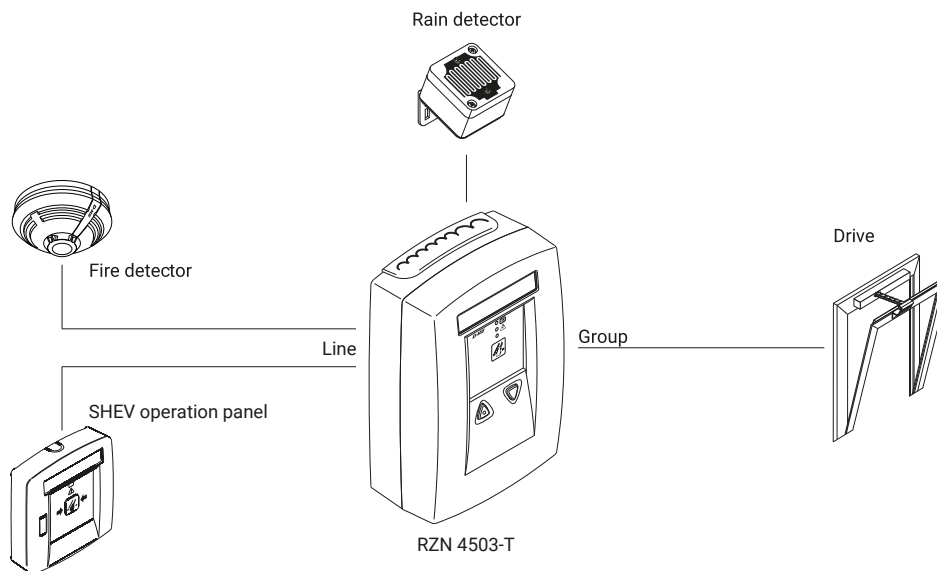

Dimensions

All specifications in mm

